


ENGINE TIMING (SINGLE & TWIN CYLINDER, ALL MODELS)

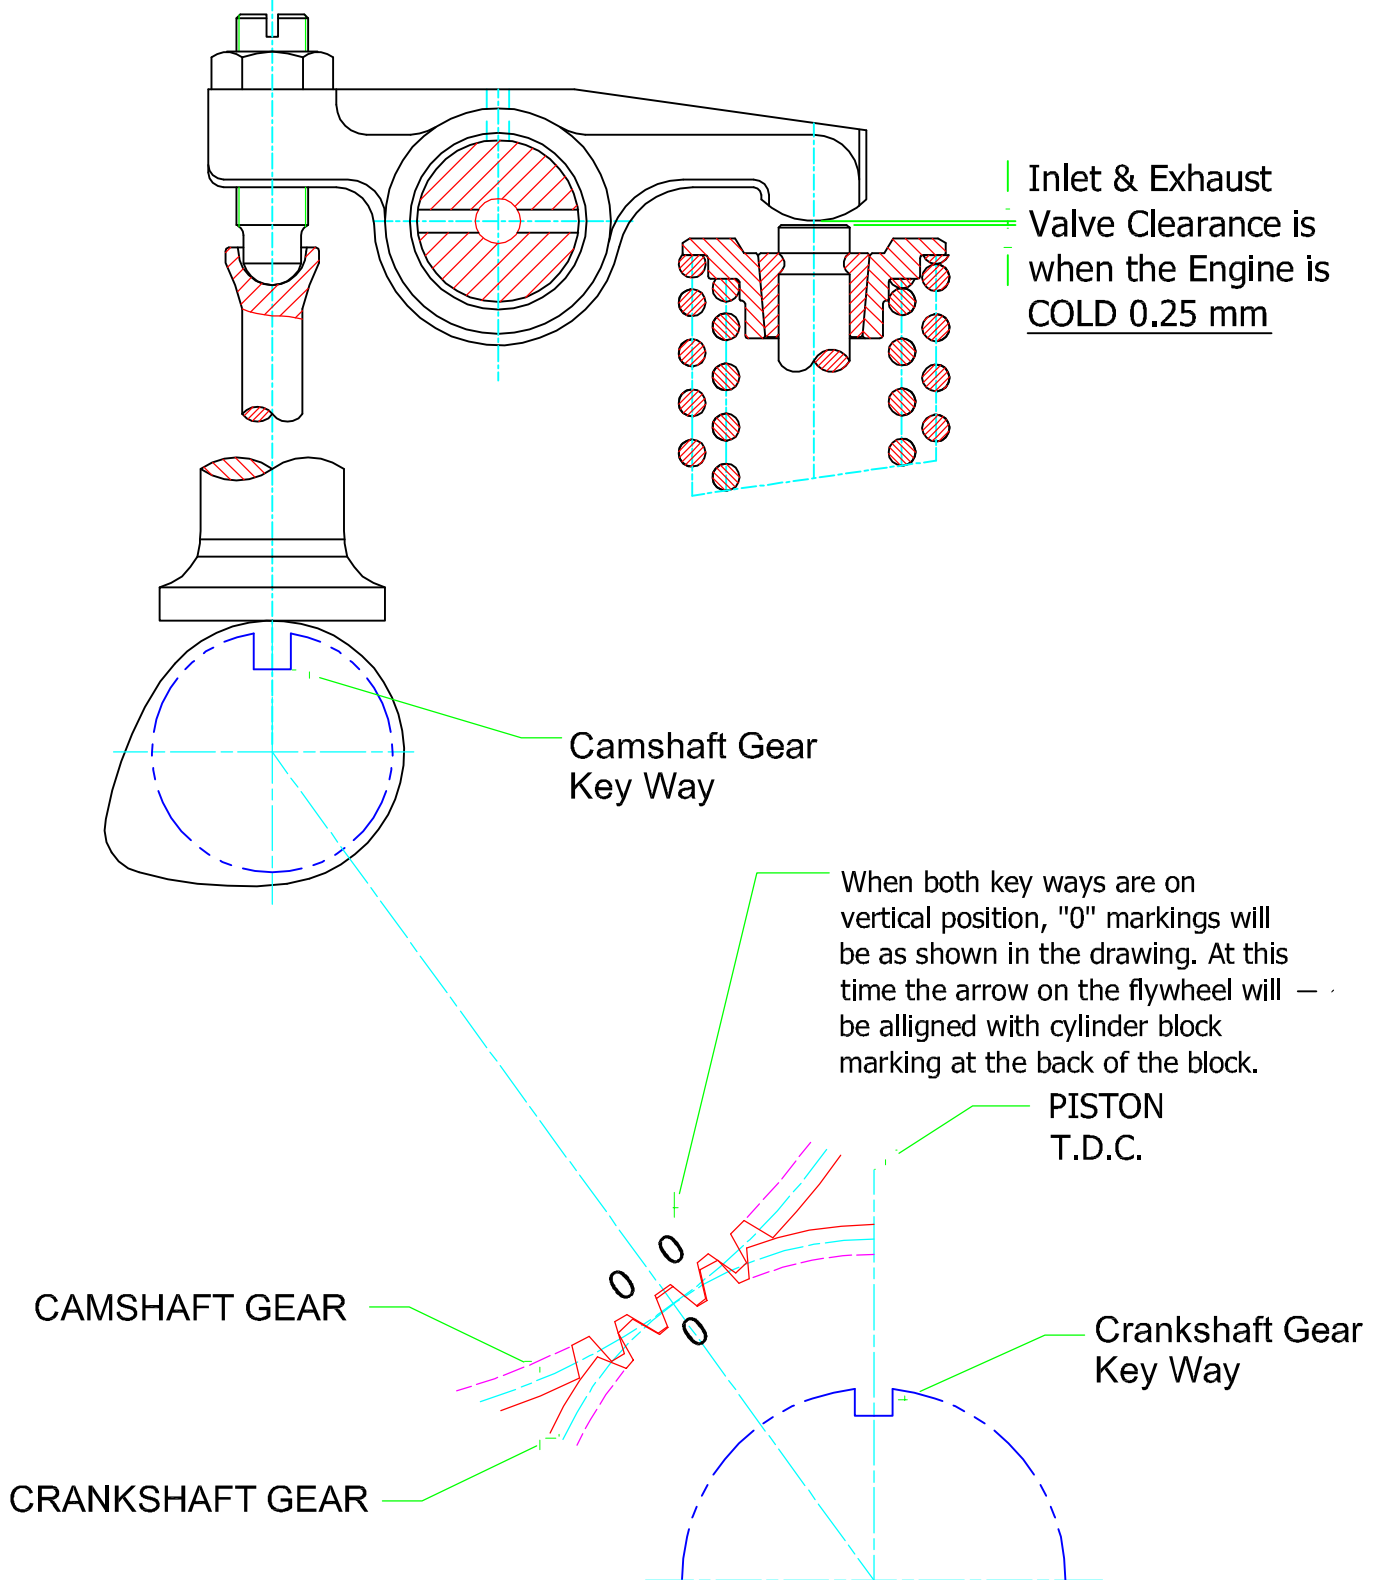

NOTE: Operating Clearance between gears: 0.05 - 0.10mm.